



K KONGSKILDE
VIBRO CROP VCR



Kongskilde Vibro Crop VCR

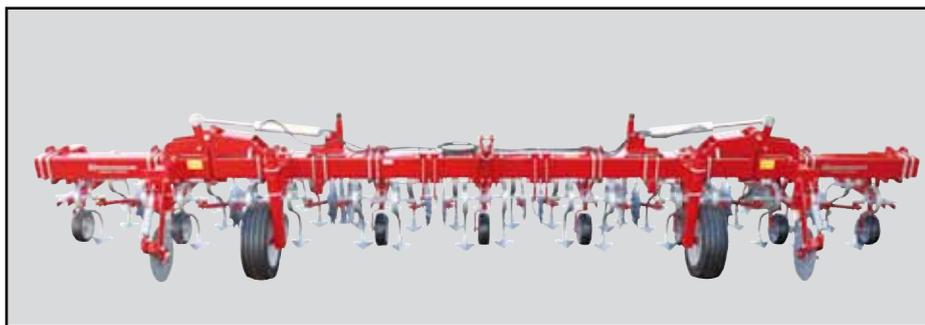

Heavy duty inter-row cleaner VCR.

Range

The VCR – inter-row cultivator range is available in configuration ranging from 4 to 12 rows, accommodating row spacing from 50 cm and wider. It is designed for high speed, high residue cultivation with a wide range of optional toolings to meet virtually any row crop cultivation. It also improves the soil's ability to supply crops with water, air and nutrients while decreasing expensive chemical use. The Kongskilde VCR can be used e.g. in beets, maize, beans or even cotton.



Strong and vibrant tine with cutting share.

Toolbar

The 180 x 180 x 8mm toolbar secures due to its dimensions and construction, a long lifetime even with rugged field work. The outer-wings are lifted hydraulically with double acting cylinders for maintaining full control while in operation. The 180 degree flat fold secures easy and safe transport from field to field. The 71 cm free-height offers the possibility to work until late in the growing season depending of the crop.

Tine / share

The Kongskilde VTM-tine equipped with an 18.5 cm wide cutting share, is very strong and vibrant. It cuts-off the roots and brings the weeds to the surface to dry out. Other type shares are available as optional equipment. They are all durable and penetrate well even in tough conditions.

Parallelogram


All the tines and extra optional equipment are fitted on a unique flat toolbar carrier frame which is parallelogram suspended to the main toolbar. The heavy duty channel arms secure a very stable and steady movement which results in a thorough cleaning between the rows, close to the plants without damaging their roots.



Flat folding for safe transport.

Versatile

The strong frame provides a durable construction to be able to meet various application needs. For more details or other executions, just ask Kongskilde.

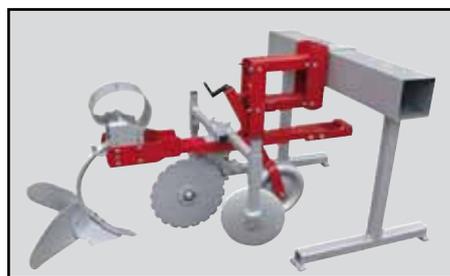

Other row widths and parallelogram executions on request.

Technical specification

Type (based on 90 cm row width)	VCR-5-438	VCR-5-656	VCRF-5-874	VCRF-5-12110
Number of rows	4	6	8	12
Frame width, cm	380	560	740	1100
Transport width, cm	380	560	460	640
Number of tines	21	31	41	61
Number of stabilizing discs / Number of support wheels	1 / 0	1 / 0	2 / 2	2 / 2



Kongskilde Industries A/S

Skælskørvej 64

DK-4180 Sorø • Denmark

Tel. +45 33 68 35 65 • Fax. +45 33 68 86 22

mail@kongskilde.com

www.kongskilde.com