

Rear mounted drum mower - CM 305



Working width 3.05 m




Powered by Kongskilde



Spring-relieved boom arm

CM 305 is suspended in a strong springrelieved boom arm. The two strong springs ensure a smooth operation and a low ground pressure.

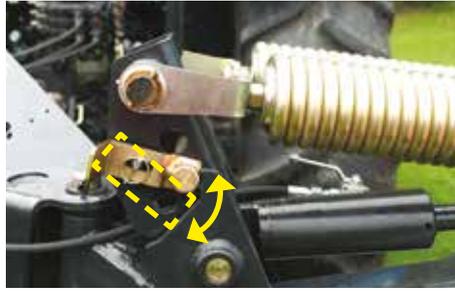

Setting of relief

The relief of the machine can be adjusted in several positions so it can be adapted to the local ground conditions.



Hydraulic stone release

The machine is equipped with hydraulic stone release. In case of collision with protruding stones etc. the cutting unit moves backward so that machine damage is minimised. The hydraulic cylinder is also used when the machine is swivelled to the rear to transport position.



Easy Lift spares the machine

By means of a hydraulic cylinder the mower is lifted from the ground when turning on the headland. This means that it is not necessary to lift the link arms on the headland. Thereby you avoid deviation of the PTO shaft with risk of vibrations and secondary damage.



Easy service

The guard can easily be folded up to get access to service and replacement of blades. Furthermore the guard has been fitted with a strong tubular guard which protects the machine in case of collisions.



Quick replacement of blades

Blades are replaced quickly and easily by means of the supplied ergonomic tool without loosening any bolts or nuts. Press down gently – the blade is released and the new blade can be mounted.



Accessory - swath rollers



CM 305 can be equipped with 2 adjustable swath rollers which gather the crop to a swath.



The swath rollers are adjusted in steps by means of a device placed on top of the guard.

Technical data

	CM 305
Working width	3.05 m
Number of drums	4
Blades	12
Tractor, min.	66 kW/90 HP
Stone release	Hydraulic
PTO, size - type	1 ³ / ₈ - 6 splines
PTO rpm	1000
Oil outlets	1 DV + 1 EV
Weight	950 Kg

Some photos may show products with additional equipment.
See price list for current standard and additional equipment.
We reserve the right to change the construction and specification details without notice.
Printer's errors excepted.



Powered by Kongskilde

Kongskilde Industries A/S

Augustenborg Landvej 11 · 6400 Sønderborg · Denmark

Phone: +45 33 68 39 00 · www.kongskilde.com