


# Power Harrow HK 10



Light-weight power harrow for low HP tractors

# Howard Power Harrow HK 10

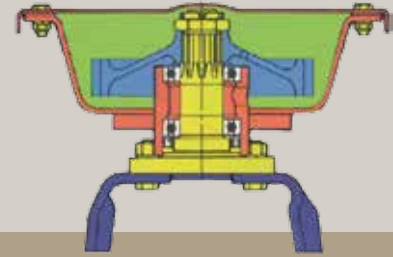

Light-weight power harrow for low HP tractors, aimed to meet the requirements of the private gardener and for horticultural farms, greenhouse cultivation, and market gardening.

#### Rotor

Four rotors per meter working width combined with special designed blades ensure excellent working quality. The rotor shaft and blade carrier are made from a one piece, high quality forging.

#### Gearbox

The single speed gearbox allows 540 RPM and rotor speeds of 280/min.

#### Depth control

All Howard HK 10 models can be equipped with rear cage roller. The required working depth can easily be adjusted with a pin/hole construction.

#### Linkage

The fixation points for the lower linkage arms are easily adjusted to suit narrow tractors with Cat. I or Cat. II.

#### Side guards

The rigid side guards are easily adjustable in relation to size of blade and working depth.

## Technical specifications

Standard equipment	Optional equipment
<ul style="list-style-type: none"> <li>• Single speed transmission box 540/min</li> <li>• Rotor speed 280/min</li> <li>• Blades 250 x 10 mm</li> <li>• PTO shaft with shearbolt</li> </ul>	<ul style="list-style-type: none"> <li>• Spring loaded side guards</li> <li>• Tooth Packer Roller</li> <li>• Cage Roller</li> </ul>

Type	Working width m	Power requirement kW(Hp)	Transport width m	Weight w/o cage roller kg	Weight with cage roller kg	Number of Rotors
HK10-100S	1.00	15-59 (20-80)	1.12	270	320	4
HK10-125S	1.25	15-59 (20-80)	1.36	300	360	5
HK10-150S	1.50	18-59 (25-80)	1.61	320	400	6
HK10-175S	1.75	18-59 (25-80)	1.85	350	440	7
HK10-200S	2.00	22-59 (30-80)	2.10	370	480	8
HK10-225S	2.25	26-59 (35-80)	2.35	390	520	9



Kongskilde UK Ltd.

Tel. 01263 713291

mail@kuk.kongskilde.com

www.kongskilde.com